


	<b>Specification</b>
	<b>for Material-No.: 207-BA4A0YA6</b>
	<b>Status: 26.10.2020</b>

**Description:** UN TOPline IBC 600 l, plastic skid pallet integrated valve DN50 (2" inch) PE-CP gasket, top lid DN 150 gasket EPDM, natural colored , 16 vertical bars, label plate on front side

**Exposure**

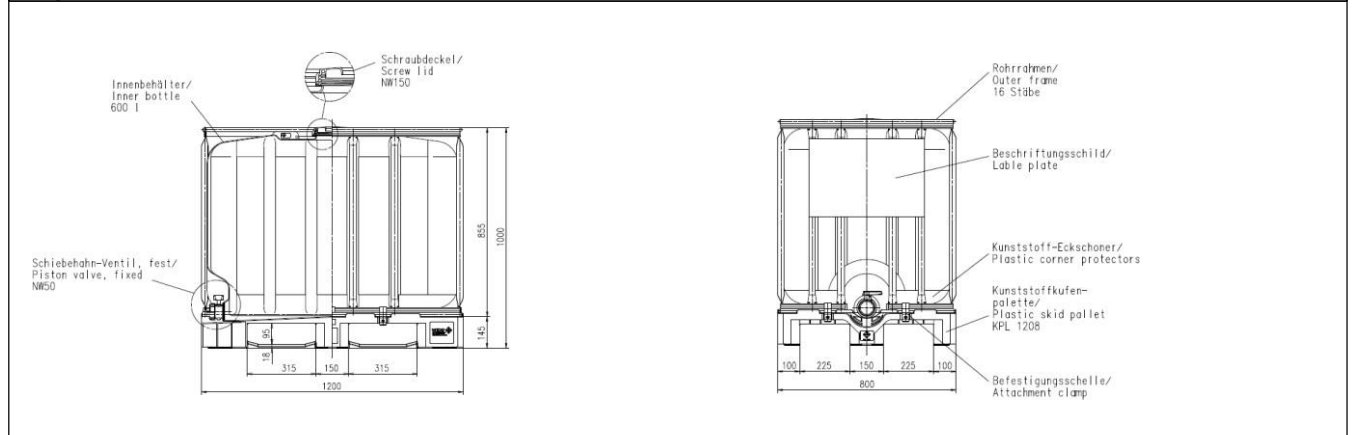

<b>Dimensions (mm):</b>	<b>Measures</b>	<b>Tolerances</b>
Length external	1.200 mm	+ 5 mm / - 5 mm
Width external	800 mm	+ 5 mm / - 5 mm
Height external	1.000 mm	+ 5 mm / - 5 mm
Entry height min.	90 mm	
Length label plate front	522 mm	
Width label plate front	350 mm	
<b>Capacity:</b>		
Brimful capacity min.	650 l	
Capacity min.	600 l	

<b>Model:</b>	
Cage:	16 vertical bars, Pack One sticker, 10 clamps , Weight ( kg) approx. 16,3
Filling opening:	Filling opening (top lid) DN 150 with S 160 x 7 internal thread (PE-HD), colour: black; EPDM gasket 445 x 7 mm;
Pressure balance:	-
Discharge:	Piston valve DN 50 (2"inch) screwed with S 60 x 6 outer thread, colour: natural; valve gasket: PE-CP; tamper evident aluminum seal welded on the outlet side; closed with screw cap DN 50 black colour with S 60 x6 internal thread; handle PP: colour blue
Pallet:	4-way entry runner plastic skid pallet ,colour: black, with integrated steel reinforcement, 4 corner protectors, weight (kg): ca. 12,0 kg
Weight:	Total 47,5 +- 5,0%
Specialities:	-

	<b>Specification</b>
	<b>for Material-No.: 207-BA4A0YA6</b>
	<b>Status: 26.10.2020</b>

<b>Material:</b>	
Frame:	Horizontal and vertical welded steel tubes inside and outside galvanized rectangular steel cage is screwed on the pallet with galvanized clamps and screws ,4 Cross bars: steel tubes inside and outside galvanized Cross bars fixed with galvanized screws to horizontal top frame.
Bottle:	HDPE, natural coloured, UV-stabilized, Weight (kg): 12,0 + 2% - 0 %
Filling lid:	HDPE Colour: black
Lid gasket:	EPDM
Screw cap valve:	HDPE Colour: black
Screw cap gasket:	Aleovit
Bung /seal cap:	-
Valve body:	HDPE
Valve plate:	HDPE
Gasket valve plate:	PE-CP
Handle:	PP, colour blue
Handle gasket:	FKM (Viton)
Corner protectors:	HDPE black
Alu-seal:	BaCo Seal PE-Coat SY 6.4
Accessories:	Outlet pipe elbow NW 50 with S 60 x 6 internal thread and S 60x6 external thread, fixed on every IBC.

<b>Marking:</b>	None
-----------------	------

<b>Signing:</b>	Label plate front with sticker PackOne and barcode with batch number,
-----------------	---

<b>UN-Kennzeichnung:</b>	D/BAM 12441 .. (31HA1)
--------------------------	------------------------